


# Missile LXQ Series - LXQM15000-H H150 Shank

## Hammer Service Log


### Wear Sleeve / Piston Clearance

| Part        | New Dimension |        | Discard Clearance               |
|-------------|---------------|--------|---------------------------------|
| Wear Sleeve | A             | 9.449" | greater than or equal to 0.010" |
| Piston OD   | B             | 9.442" |                                 |

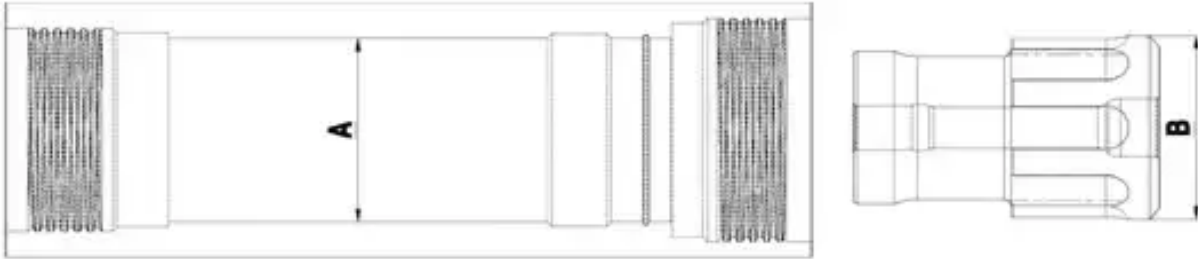


### Inner Cylinder / Piston Clearance

| Part        | New Dimension |        | Discard Clearance               |
|-------------|---------------|--------|---------------------------------|
| Cylinder ID | C             | 7.874" | greater than or equal to 0.010" |
| Piston OD   | D             | 7.867" |                                 |

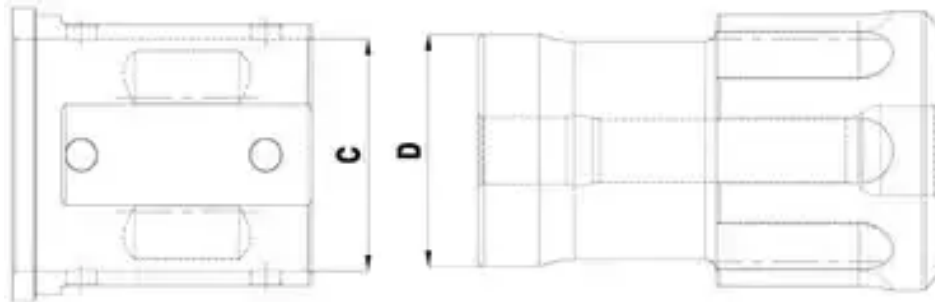

### Distributor Probe / Piston ID Clearance

| Part                 | New Dimension |        | Discard Clearance               |
|----------------------|---------------|--------|---------------------------------|
| Distributor Probe OD | F             | 2.551" | greater than or equal to 0.010" |
| Piston ID            | E             | 2.559" |                                 |

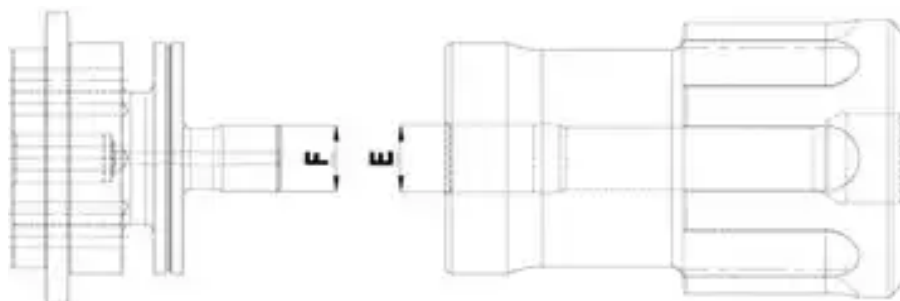

## External Wear

| Description   | Wear Limit |
|---|------------|
| Wear Sleeve Discard Dimension   | 0.00"      |
| NOTE:<br>Chuck should be replaced when wear transfers to wear sleeve. |            |