

Missile LXQ Series - LXQR5000 IR350 Shank

Hammer Service Log


Wear Sleeve / Piston Clearance

Part		New Dimension	Discard Clearance
Wear Sleeve	A	3.465"	greater than or equal to 0.010"
Piston OD	B	3.4561"	




Inner Cylinder / Piston Clearance

Part		New Dimension	Discard Clearance
Cylinder ID	C	2.795"	greater than or equal to 0.010"
Piston OD	D	2.791"	

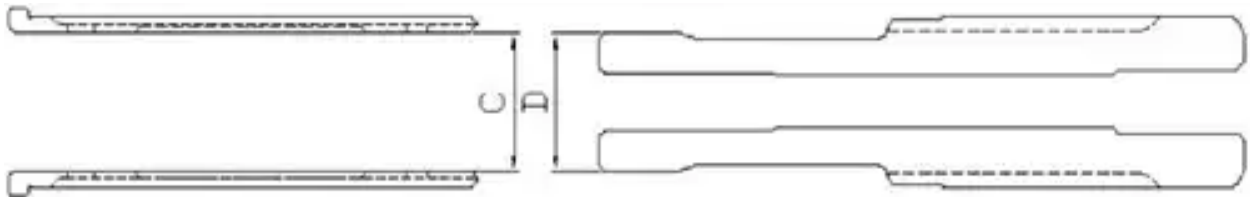

Distributor Probe / Piston ID Clearance

Part		New Dimension	Discard Clearance
Distributor Probe OD	F	1.177"	greater than or equal to 0.010"
Piston ID	E	1.181"	

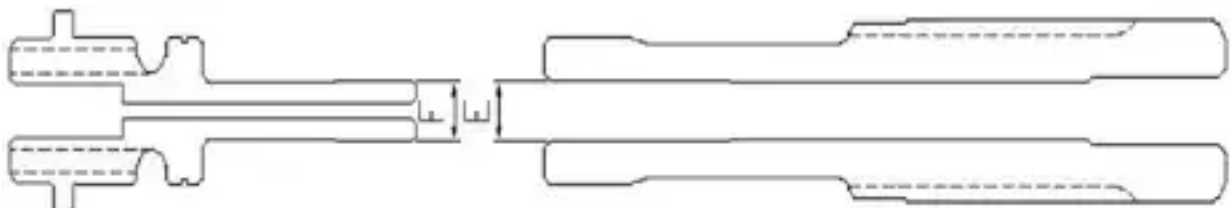

External Wear

Description	Wear Limit
Wear Sleeve Discard Dimension	4.134"
NOTE: Chuck should be replaced when wear transfers to wear sleeve.	