

Missile LXQ Series - LXQR8000 IR380 Shank

Hammer Service Log


Wear Sleeve / Piston Clearance

Part	New Dimension		Discard Clearance
Wear Sleeve	A	5.827"	greater than or equal to 0.010"
Piston OD	B	5.822"	




Inner Cylinder / Piston Clearance

Part	New Dimension		Discard Clearance
Cylinder ID	C	4.803"	greater than or equal to 0.010"
Piston OD	D	4.797"	

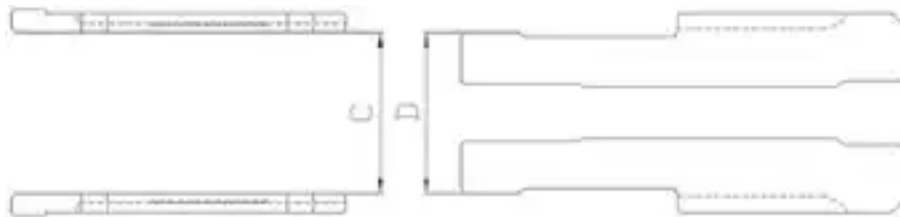

Distributor Probe / Piston ID Clearance

Part	New Dimension		Discard Clearance
Distributor Probe OD	F	1.765"	greater than or equal to 0.010"
Piston ID	E	1.772"	

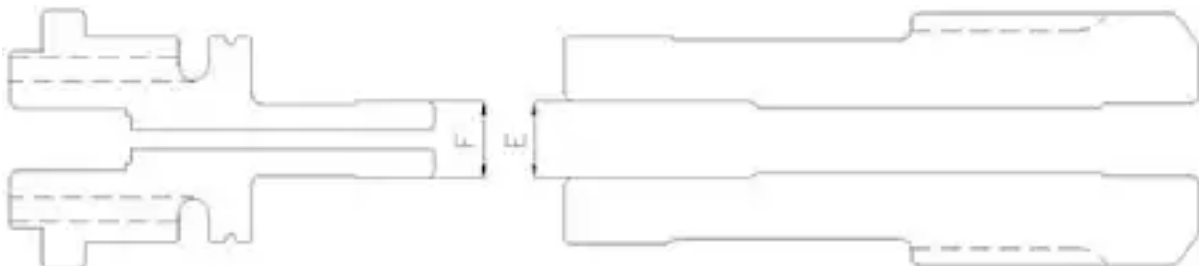

External Wear

Description	Wear Limit
Wear Sleeve Discard Dimension	6.693"
NOTE: Chuck should be replaced when wear transfers to wear sleeve.	