




# 1.0RHP “SPECIAL SWIVEL”

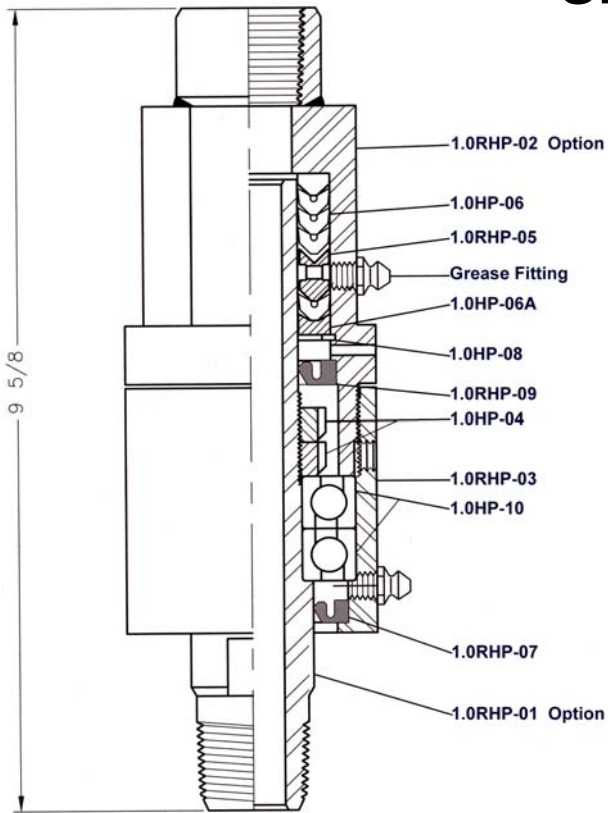

- Fluid Passage – 3/4”
- Compact Design
- Chevron (V-Ring) Packing – Grease Lubrication
- Thrust ball bearings for pressure and radial load support
- Choice of hose and lower connection thread
- Designed for easy field maintenance and repairs
- Working pressure to 2500 PSI

### TECHNICAL DATA

LENGTH	WIDTH	WEIGHT	HOSE CONN.	LOWER CONN.	WATERCOURSE	WORKING PRESSURE
10	3	9 1/4”	1”	1”	3/4”	To 2500 PSI

**WEIGHT CAPACITY**  
DESIGNED FOR PRESSURE LOAD ONLY

### PARTS LIST

PART NUMBER	NAME	NUMBER REQ.	
<b>1.0RHP-9300-XX</b>	WESTERN HIGH PRESSURE SWIVEL, 1” NPT FEMALE HOSE CONNECTION STRIAIGHT UP WITH 1” NPT LH PIN LOWER CONNECTION STRAIGHT		
	ADD FOR SIDE WITH STRAIGHT UP HOSE CONNECTION		
	ADD FOR “SPECIAL SHAFT”		
1.0HP-04	BEARING LOCKNUT	2	
1.0HP-06	PACKING SET	1	
1.0HP-06A	PACKING SEAT RING	1	
1.0HP-08	PACKING RETAINER	1	
1.0HP-10	BEARING	2	
1.0RHP-01BA-LP	SPINDLE, 1” NPT LEFT HAND PIN	1	
1.0RHP-01BA-RB	SPINDLE, 1” NPT RIGHT HAND BOX	Option	
1.0RHP-02A	GOOSENECK 1” NPT FEMALE STRAIGHT UP	1	
1.0RHP-02B	GOOSENECK 3/4” NPT FEMALE STRIAIGHT OUT	Option	
1.0RHP-03	BEARING HOUSING	1	
1.0RHP-05	LANTERN RING	1	
1.0RHP-07	LOWER SEAL	1	
1.0RHP-09	UPPER SEAL	1	

Other sizes of connections available, please consult factory.

Option for above swivel, may affect pricing of complete swivel. Other options available, please consult factory.

