




5.0 DJ ROTATING HEAD “SPECIAL SWIVEL”

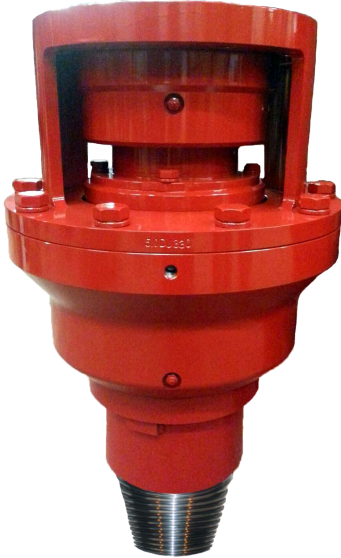

- Fluid Passage – 5” Maximum
- Adjustable tapered roller bearing
- Chevron V-Ring Packing
- Grease Lubricated – Bearings & Packing
- For Working Pressure to 2500 PSI

TECHNICAL DATA

LENGTH	WIDTH	WEIGHT	HOSE CONN.	LOWER CONN.	FLUID PASSAGE	WORKING PRESSURE
20 5/8”	15”	395	5”, 150 Flange	5 1/2 IF (MOD)	To 5”	TO 1500 PSI

WEIGHT CAPACITY

DESIGNED FOR PRESSURE LOAD ONLY

PARTS LIST

PART NUMBER	DESCRIPTION	WT/LBS	QTY. REQ.
5.0DJ-2600-XX	WESTERN ROTATING HEAD, TO 5” ID, 5” FLANGED UPPER CONNECTION WITH O-RING GROOVE, 5 1/2” IF (MOD) LH PIN LOWER CONNECTION		
5.0DJ-04	BONNET		1
5.0DJ-07	SEAL, UPPER		1
5.0DJ-10	SEAL, LOWER		1
5.0DJ-11	SPACER, BEARING		1
5.0DJ-12	BEARING (CUP & CONE)		2
5.0DJ-13	NUT, BEARING ADJUSTING		1
5.0DJ-14	HOUSING, BEARING		1
5.0DJ-16	SPINDLE, 5 1/2” IF (MOD) LH PIN		OPTION
5.0DJ-18	BOX, PACKING		1
5.0DJ-19	GLAND, PACKING		1
5.0DJ-20	PACKING SET		1
5.0DJ-20-416	PACKING SET (LOW PRESSURE)		OPTION
5.0DJ-21	RING, LANTERN		1
5.0DJ-22	RING, PACKING SEAT		1
5.0DJ-25	WASHPIPE		1
OR-258	O RING, WASHPIPE / PKG BOX		2
OR-263	O RING, ADJ. NUT		1
OR-274	O RING, BONNET		1
OR-432	O RING, FLANGE		1
OR-262	O RING, PKG BOX		1
OR-260	O RING, PACKING GLAND		1

Other sizes of connections available, please consult factory.

Option for above swivel, may affect pricing of complete swivel. Other options available, please consult factory.

