



Hammer Service Log

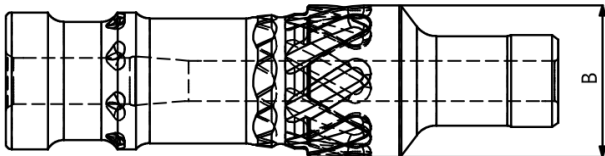



**WEAR SLEEVE / PISTON CLEARANCE**

Part	New Dimension		Discard Clearance
Wear Sleeve	A	4.74" (120.4mm)	≥0.010" (0.25mm)
Piston O.D	B	4.735" (120.29mm)	

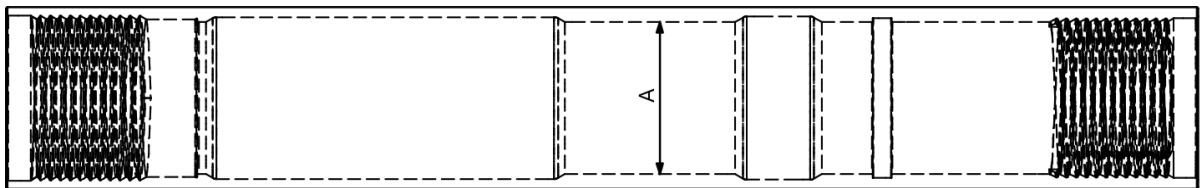


**INNER CYLINDER / PISTON CLEARANCE**

Cylinder I.D	C	4.122" (104.7mm)	≥0.010" (0.25mm)
Piston O.D	D	4.117" (104.58mm)	

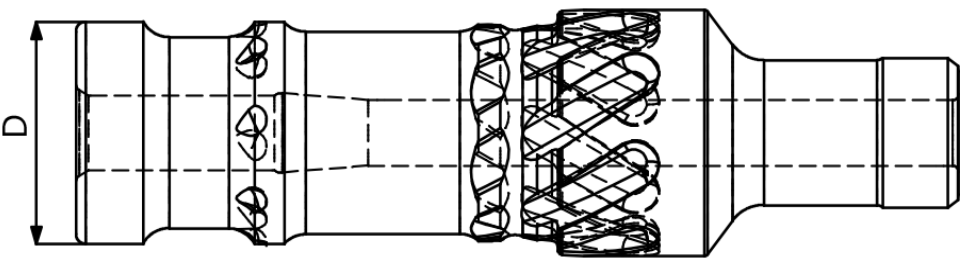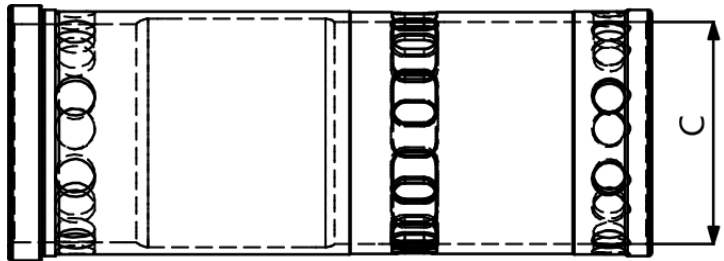


**DISTRIBUTOR PROBE / PISTON ID CLEARANCE**

Distributor Probe O.D	F	1.427" (36.25mm)	≥0.010" (0.25mm)
Piston I.D	E	1.437" (36.5mm)	

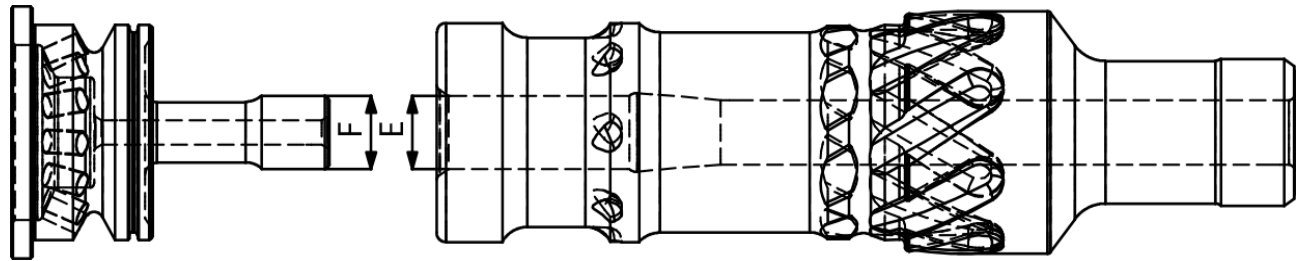

**Bearing / PISTON OD CLEARANCE**

Bearing I.D	H	2.878" (73.1mm)	≥0.010" (0.25mm)
Piston O.D	G	2.868" (72.85mm)	

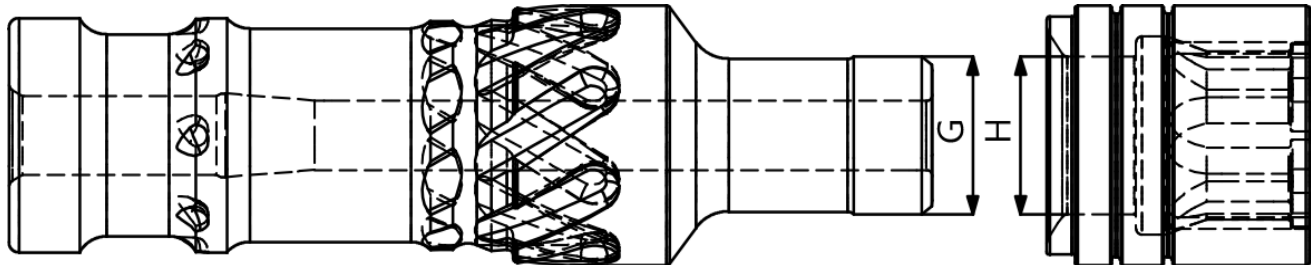

**note.**

1. Chuck should be replaced when wear transfers to wear sleeve.