
► Nova 4 " Hammer QL40 Service Log ◀

Hammer Service Log




WEAR SLEEVE / PISTON CLEARANCE

Part		New Dimension	Discard Clearance
Wear Sleeve	Α	3.216" (81.7mm)	>0.010" (0.25mm)
Piston O.D	В	3.21" (81.55mm)	≥0.010" (0.25mm)




INNER CYLINDER / PISTON CLEARANCE

Cylinder I.D	С	2.846" (72.3mm)	>0.010" (0.35mm)
Piston O.D	D	2.84" (72.15mm)	≥0.010" (0.25mm)




DISTRIBUTOR PROBE / PISTON ID CLEARANCE

Distributor Probe O.D	F	1.106" (28.1mm)	\0.010" (0.25mm)
Piston I D	F	1 116" (28 35mm)	- ≥0.010" (0.25mm)

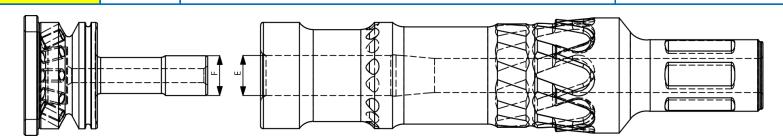

Bearing / PISTON OD CLEARANCE

Bearing I.D	Н	2.204" (56mm)	≥0.010" (0.25mm)
Piston O.D	G	2.195" (55.75mm)	

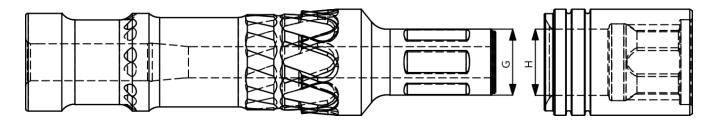

note

1. Chuck should be replaced when wear transfers to wear sleeve.