
► Titan 6" Hammer M60 Service Log ◀


Hammer Service Log



WEAR SLEEVE / PISTON CLEARANCE


| Part | New Dimension | | | Discard Clearance |
|-----------------|---------------|------------|-------------|-------------------|
| Wear Sleeve I.D | Α | 117.000 mm | 4.606299 in | ≥0.010" (0.25mm) |
| Piston O.D | В | 116.890 mm | 4.601969 in | |

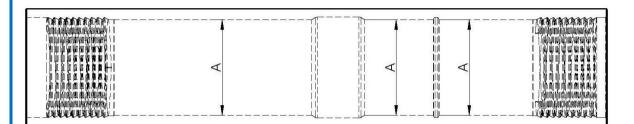




TUBE / PISTON ID CLEARANCE

| TUBE O.D | F | 39.880 mm | 1.570079 in | ≥0.010" (0.25mm) |
|------------|---|-----------|-------------|--------------------|
| Piston I.D | E | 40.000 mm | 1.574803 in | ≥0.010 (0.23Hilli) |

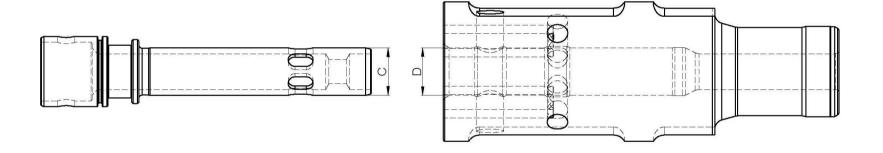

Bearing / PISTON OD CLEARANCE

| Piston O.D | E | 75.400 mm | 2.968504 in | ≥0.010" (0.25mm) |
|-------------|---|-----------|-------------|------------------|
| Bearing I.D | F | 76.000 mm | 2.992126 in | <u> </u> |

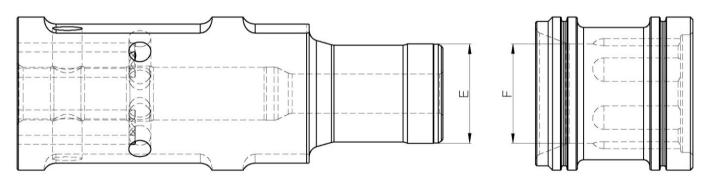

Piston Stroke: 85.000 mm 3.346457 in

note.

1. Chuck should be replaced when wear transfers to wear sleeve.