


40RM

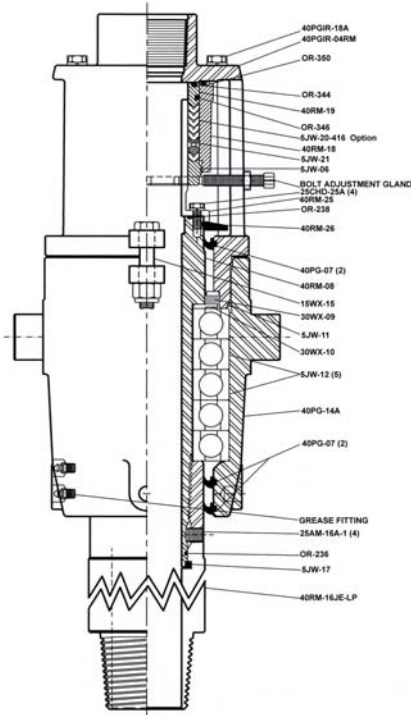

- For TH-75 and TH-75W & T3W Deep Hole
- Adjustable Chevron V-Ring Packing
- Full 3" Fluid Passage
- Grease lubricated packing and bearing
- Quick change packing assembly
- Low pressure packing assembly available

TECHNICAL

LENGTH	WIDTH	WEIGHT	HOSE CONN.	LOWER CONN.	FLUID PASSAGE	WORKING PRESSURE
40 ½	8 15/16	280	3" NPT	3 ½ IF (MOD)	3"	TO 1500 PSI

WEIGHT CAPACITY

STATIC	ROTATING
140,000 LBS	71,000 LBS @ 100 RPM

PARTS LIST

PART NUMBER	NAME	QTY. REQ.	
40RM-6001-XXX	SWIVEL, 3" NPT FEMALE STRAIGHT UP, 2" OD TRUNNION PINS 815/16" SHOULDER TO SHOULDER, WINDOW 45 LEFT OF TRUNNION PIN, 3 ½" IF LH PIN (MOD) LOWER CONNECTION LOW PRESSURE PACKING		
40PGIR-18A	BOLTS W/LOCK WASHER	4	
40PGIR-04RM	GOOSENECK, 3" NPT FEMALE, STR. UP	1	
OR-350	O RING, PACKING BOX	1	
OR-346	O RING, PACKING GLAND	1	
OR-344	O RING, PACKING GLAND	1	
5JW-20-416	PACKING SET, LOW PRESSURE	1	
5JW-20	PACKING SET	OPTION	
40RM-18	PACKING BOX	1	
40RM-19	PACKING GLAND	1	
5JW-21	LANTERN RING	1	
5JW-06	PACKING ADJUSTING GLAND	1	
40RM-25	WASHPIPE	1	
40RM-26	SLINGER RING	1	
OR-238	O RING, WASHPIPE	1	
40PG-07	HOUSING SEAL	3	
15WX-15	LOCK BOLT AND NUT	1	
30WX-09	SEAL, SHIELD	1	
5JW-11	WIRE, RETAINER	1	
30WX-10	SHIELD, BEARING	1	
40RM-08	BEARING SPINDLE	1	
5JW-12	BEARINGS	5	
40PG-14A	BEARING HOUSING, WITH 2" TRUNNION PINS	1	
25AM-16A-1	SET SCREWS	4	
OR-236	O RING	1	
5JW-17	SPINDLE THREAD SEAL	1	
40RM-16JE-LP	LOWER CONNECTION, 3 ½" IF LH PIN (MOD)	1	
25CHD-25A	BOLT, WASHPIPE	4	

Other sizes of connections available, please consult factory.

Option for above swivel, may affect pricing of complete swivel. Other options available, please consult factory.

