

America West Drilling Supply



Titan XL QL60 Shank

Hammer Specifications

Length (w/o drill bit)	38.3"
Outside Diameter	5.67"
Weight (w/o bit)	191.1 lbs.
Cylinder Bore	4.6063"
Piston O.D.	4.6020"
Piston Stroke	3.3465"
Piston Weight	42.3 lbs.
Hole Sizes	6" - 8"
Air Pressure Consumption	100 psi - 250 psi
Wrench Size	-
Connection (API Reg Pin)	Std. 3 1/2"

Features:


- **NO foot valve required**
- Easy to service
- Special heat-treated alloy piston for long life - Rockwell 60 Hardness
- Minimal performance loss when injecting foam or water

1350 E. Glendale Avenue
Sparks, NV 89431
(800) 800-8444 | (775) 355-1199
Fax (775) 355-8775
sales@awds.com



www.awds.com

America West Drilling Supply

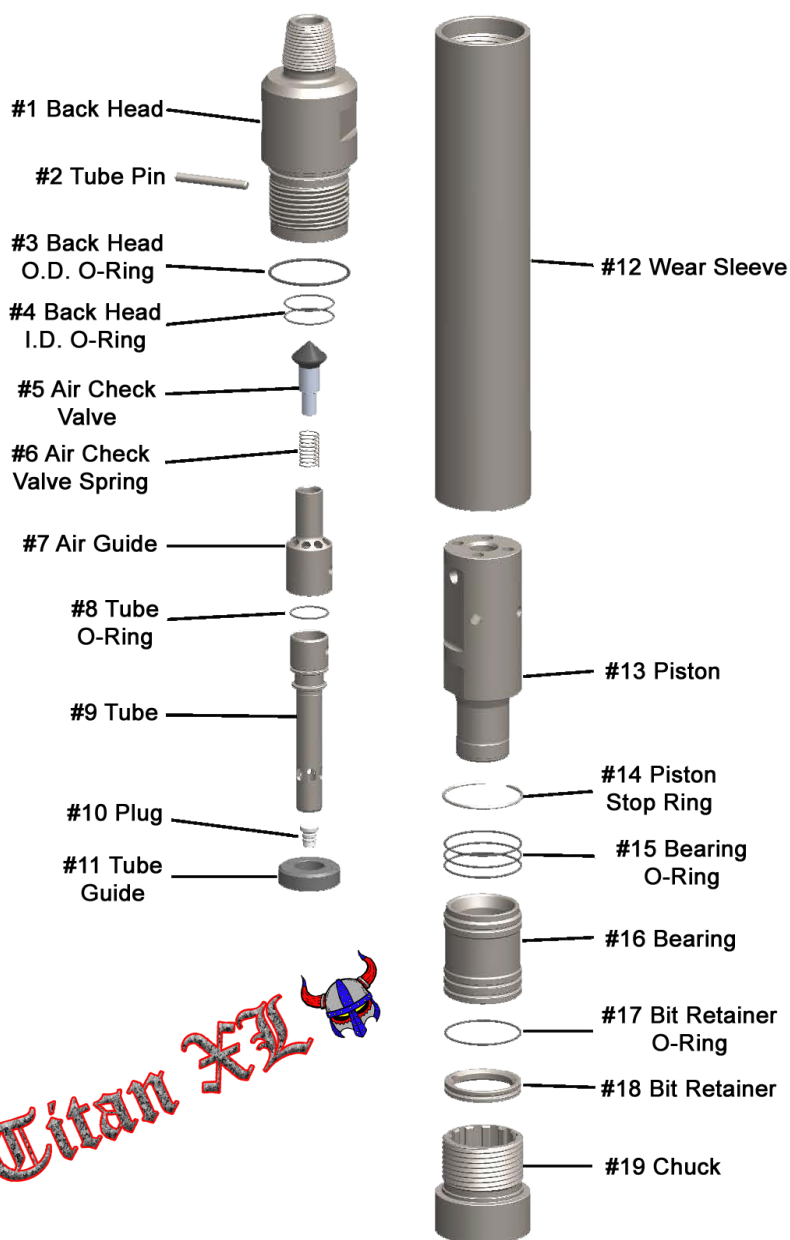

Item #	Description	Part #
1	Back Head	AWTI6001
2	Tube Pin	AWTI6002
3	Back Head OD O-Ring	AWTI6003
4	Back Head ID O-Ring	AWTI6004
5	Air Check Valve	AWTI6005
6	Air Check Valve Spring	AWTI6006
7	Air Guide	AWTI6007
8	Tube O-ring	AWTI6008
9	Tube	AWTI6009
10	Plug	AWTI6010
11	Tube Guide	AWTI6011
12	Wear Sleeve	AWTI6QL012
13	Piston	AWTI6QL013
14	Piston Stop Ring	AWTI6014
15	Bit Bearing O-Ring	AWTI6015
16	Bit Bearing	AWTI6QL016
17	Bit Retainer O-Ring	AWTI6017
18	Bit Retainer	AWTI6QL018
19	Chuck (Drive Sub)	AWTI6QL019

Titan XL



Titan XL QL60 Shank Hammer

Air Consumption Chart

PSI	150	200	250	300	350	400
CFM with blank choke	343	659	972	-	-	-
with 1/8" choke	-	-	-	-	-	-
with 1/4" choke	-	-	-	-	-	-